



## TECHNICAL DATA - GL.01

PHOTOVOLTAIC GLASS		1245 x 1242
		L Vision (20%)
<b>Electrical data test conditions (STC)</b>		
Nominal peak power	53	P <sub>mpp</sub> (Wp)
Open-circuit voltage	97	V <sub>oc</sub> (V)
Short-circuit current	0.97	I <sub>sc</sub> (A)
Voltage at nominal power	67	V <sub>mpp</sub> (V)
Current at nominal power	0.79	I <sub>mpp</sub> (A)
Power tolerance not to exceed	± 5	%
STC: 1000 w/m <sup>2</sup> , AM 1.5 and a cell temperature of 25°C, stabilized module state.		
<b>Mechanical description</b>		
Length	1245	mm
Width	1242	mm
Thickness	18.24	mm
Surface area	1.55	sqm
Weight	71	Kgs
Cell type	a-Si	Thin Film
Transparency degree	L	Vision (20%)
Front Glass	6 mm	Tempered Glass
PV Active Glass	3,2 mm	Float Glass
Rear Glass	6 mm	Tempered Glass
Thickness encapsulation	3.04 mm	PVB Foils
Category / Color code		
<b>Junction Box</b>		
Protection	IP65	
Wiring Section	2,5 mm <sup>2</sup> or 4,0 mm <sup>2</sup>	
<b>Limits</b>		
Maximum system voltage	1000	V <sub>sys</sub> (V)
Operating module temperature	-40...+85	°C
<b>Temperature Coefficients</b>		
Temperature Coefficient of Pmpp	-0,19	%/°C
Temperature Coefficient of Voc	-0,28	%/°C
Temperature Coefficient of Isc	+0,09	%/°C



\* All technical specifications are subject to change without notice by Onyx Solar

global leader in building integrated photovoltaic glass





# TECHNICAL DATA - GL.01

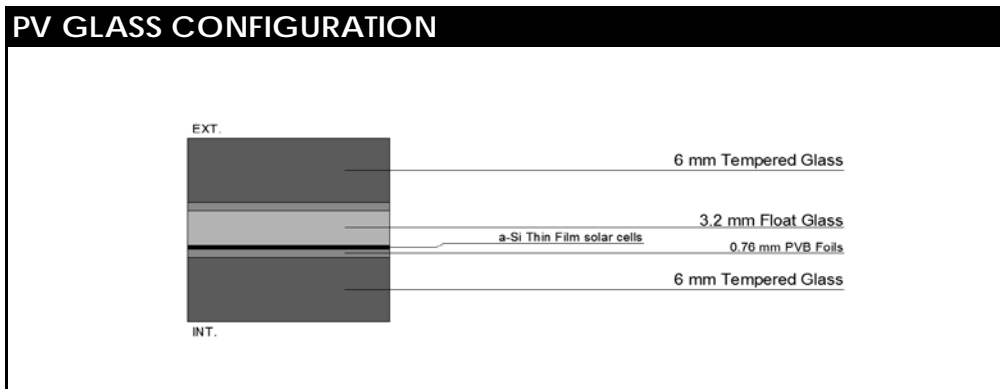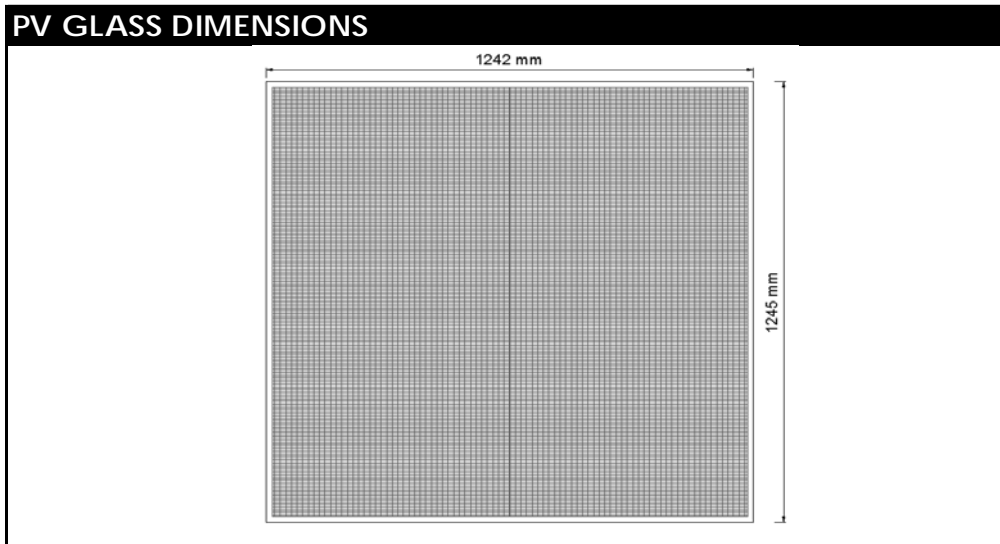

GLASS PROPERTIES	Onyx Equivalent Glass
Solar Factor/SHGC	32.00%
Light Transmission	16.30%
UV Transmission	< 1%
Light Reflection	8%
U-value [W/sqm.K]	N/A
Peak Power [Wp/sqm]	34.0

global leader in building integrated photovoltaic glass

